



# Reticle

## MIL-XT™

### Available in:

ATACR 7-35x56 F1

ATACR 5-25x56 F1


ATACR 4-20x50 F1

ATACR 4-16x42 F1

NX8 4-32x50 F1

NX8 2.5-20x50 F1

SHV 4-14x50 F1

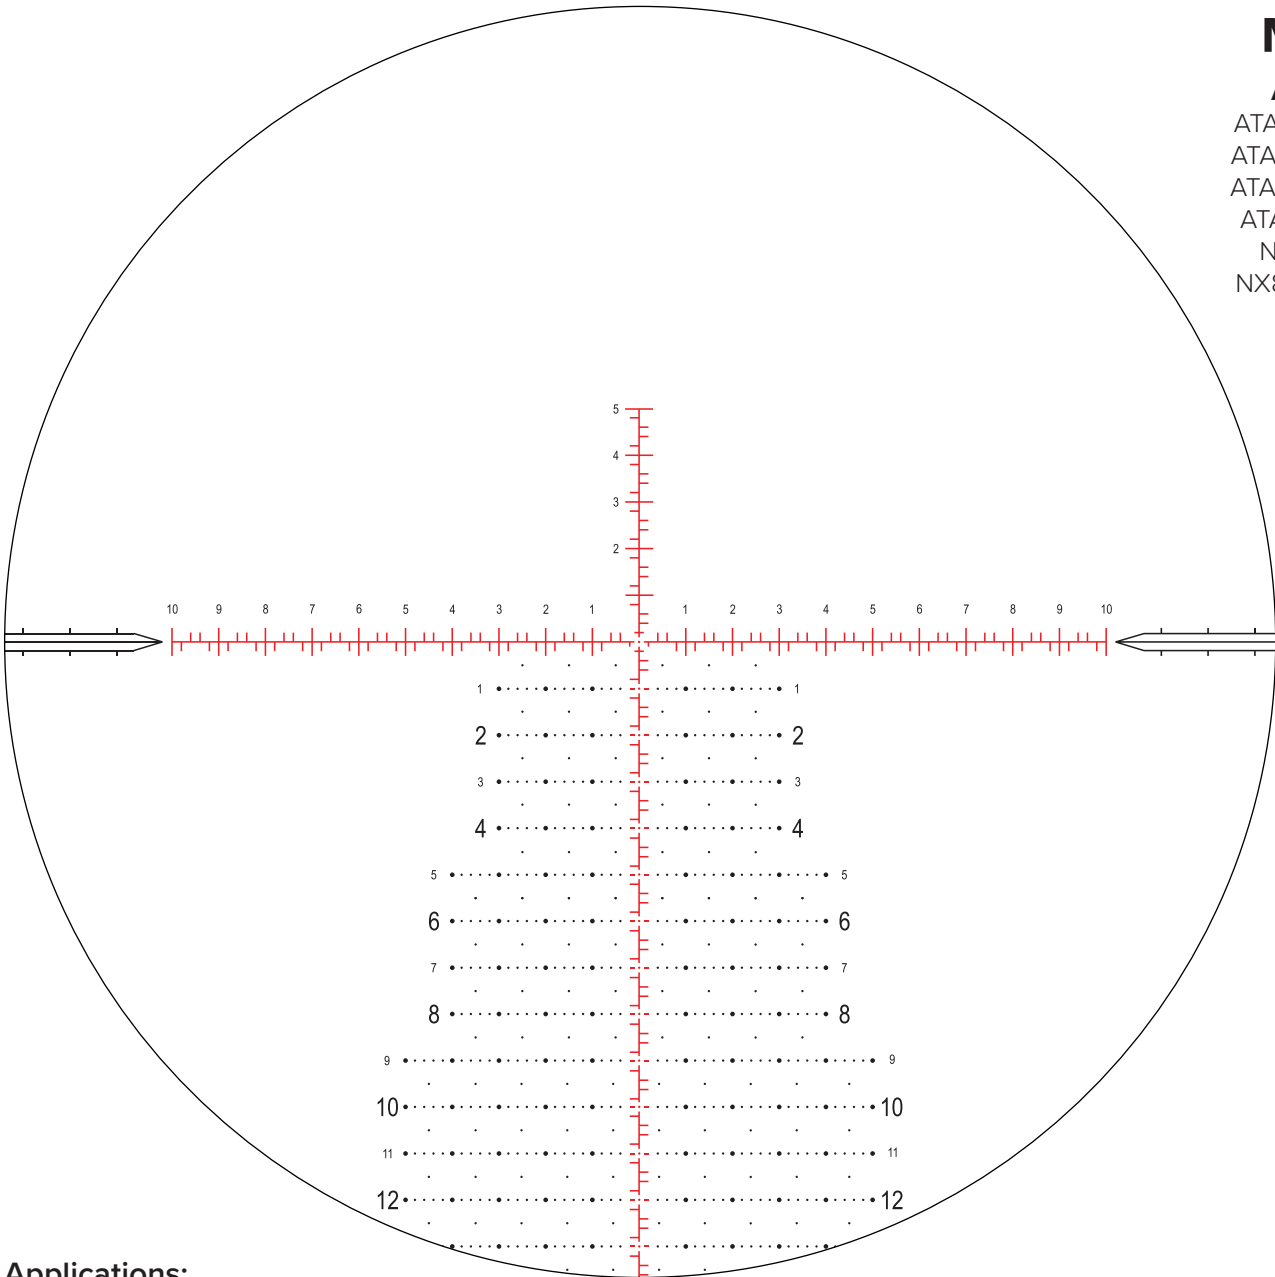

### Applications:

- Competition
- Extreme Long Range (ELR) Shooting
- Field/Tactical

### Features:

- Allows accurate hold offs and precise first-shot placement
- Floating center-dot for precise aiming point
- Excellent for range estimation and rapid target engagements
- Intelligent numbering for fast and easy holds
- Red indicates illuminated portions



# Reticle



## MIL-XT

Designed to meet the needs of today's precision rifle competitor, the MIL-XT™ reticle allows for fast and accurate shots on target.

The MIL-XT™ has a simple center dot for a fine aiming point at center, while the main lines feature .2 Mil-Radian holds. Each whole Mil-Radian is numbered for fast reference under even stressful conditions.

Below center, whole Mil-Radian intersections feature a floating dot. Dots are placed at .2 Mil-Radian increments, while whole Mil-Radians are increased in size for fast counting. Additional marks are placed at half Mil-Radian increments as well. Numbers below center alternate in size for easy counting and verification of appropriate hold points.

This reticle was designed for the competitive and field shooter, and is certain to give a competitive edge to anyone who uses it.

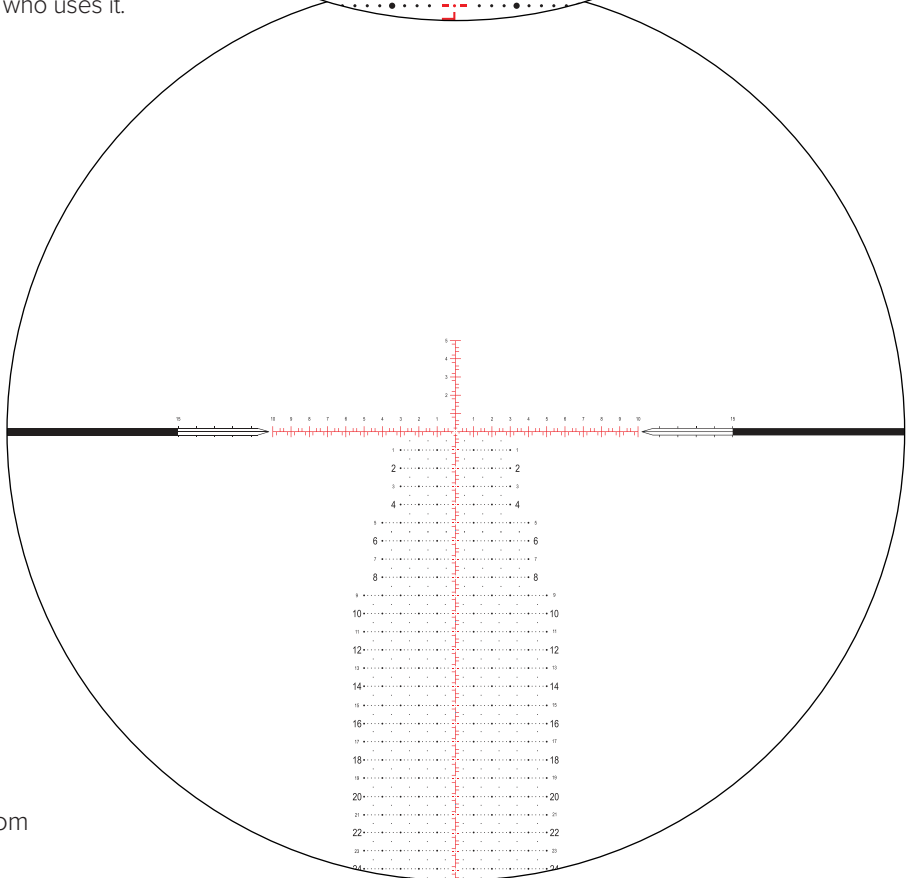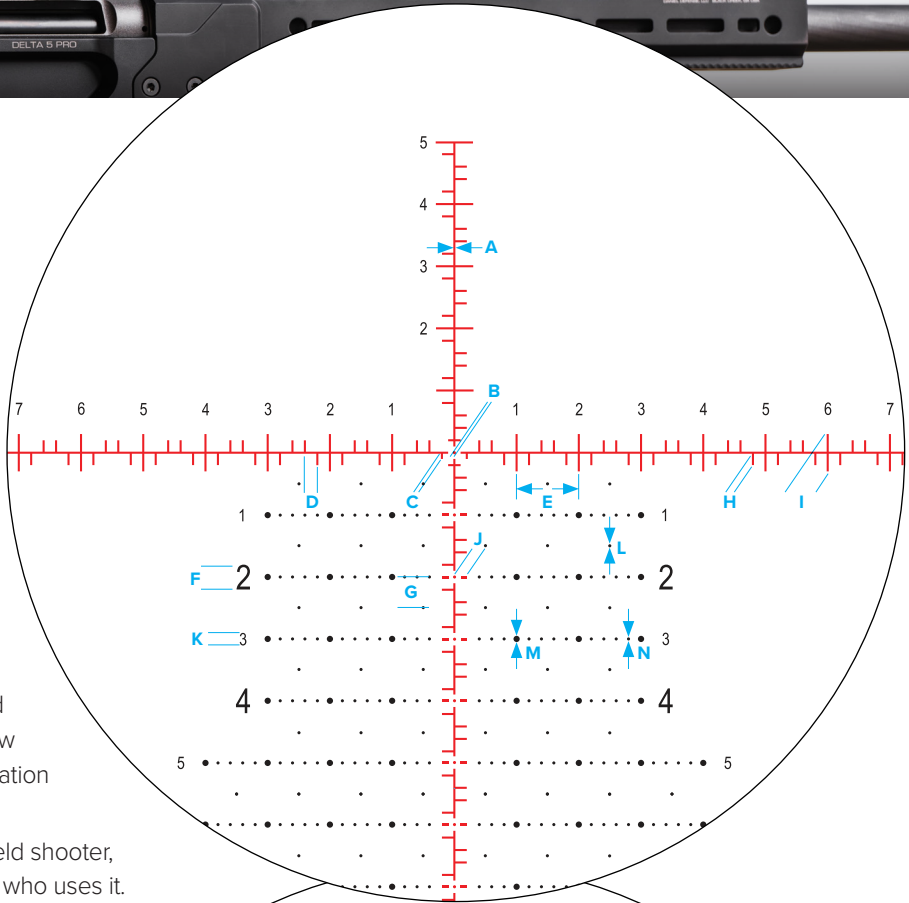

### Reticle Subtensions

<b>A</b>	see chart
<b>B</b>	.05 mil
<b>C</b>	.1 mil
<b>D</b>	.2 mil
<b>E</b>	1 mil
<b>F</b>	.4 mil
<b>G</b>	.5 mil
<b>H</b>	.2 mil
<b>I</b>	.6 mil
<b>J</b>	.2 mil
<b>K</b>	.2 mil
<b>L</b>	.05 mil
<b>M</b>	.1 mil
<b>N</b>	.05 mil

### Main Line Thickness

<b>ATACR 7-35</b>	.033 mil
<b>ATACR 5-25</b>	.030 mil
<b>ATACR 4-20</b>	.040 mil
<b>ATACR 4-16</b>	.040 mil
<b>NX8 4-32</b>	.036 mil
<b>NX8 2.5-20</b>	.041 mil
<b>SHV 4-14</b>	.043 mil

# NIGHTFORCE®

Nightforce Optics, Inc.  
 336 Hazen Lane / Orofino, ID 83544  
 Phone: 208.476.9814 / [www.nightforceoptics.com](http://www.nightforceoptics.com)  
[info@nightforceoptics.com](mailto:info@nightforceoptics.com)